


Model No. OW2012

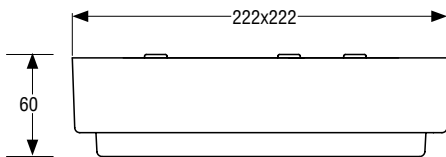

OW2012

SPECIFICATIONS:

Installation: Surface

Housing: Body is made of polycarbonate + ABS in powder coat finish

Fixing Bracket: Galvanized steel

Reflector and Diffuser: PC diffuser

Driver Multipower: Included. Power factor: >0.95
Maintenance of minimum luminous flux to 80%: 50000

SDCM/L80B10: <3 50,000 hrs

LED type

EPISTAR


Electrical: Meanwell, HEP, Fulham, Tridonic standard driver or optional with dimmable driver

Mounting: Surface

Optical flicker: Less than 1% upto 400Hz



Beam angle



Model No.	OW2012
Lamps	LED
Wattage	13W
Lumen Output	1300
CRI	≥90
CCT (K)	2700-6500
Power Factor	>0.9
Power	220-240VAC
Frequency	50/60Hz

