


LED MIRROR LIGHT

Model No. ML-WS50

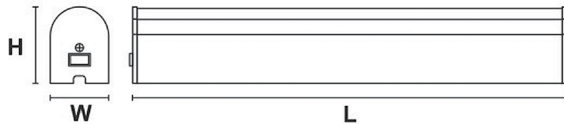

Dimension(L*W*H)
600*53*65mm
900*53*65mm

SPECIFICATIONS:

Installation: Surface

Housing: Polycarbonate and metal chrome plated

Diffuser: Opal acrylic

Driver Multipower: Included. Power factor: >0.95
Maintenance of minimum luminous flux to 80%: 50000

Optional: Clear diffuser available

SDCM / L80B10: <3, 50,000 hrs

LED type
EPISTAR

Electrical: Meanwell, HEP, Fulham, Tridonic standard driver

Mounting: Surface Fixed

Optical flicker: Less than 1% upto 400Hz

WATERPROOF SWITCH



Model No.	ML -WS50
Lamps	LED
Wattage	15W/20W
Lumen Output	1200/1600
CRI	≥90
CCT (K)	2700-6500
Power Factor	>0.9
Power	220-240VAC
Frequency	50/60Hz

